

Isobar® Premium Surge Protectors



							Data Line Protection			Ultimate Lifetime Insurance ⁽⁴⁾	Retail Packaging	Housing Style ⁽⁵⁾	
Model	Outlet Qty. (NEMA/IEC Type)	Cord Length	Plug Style	Joules ⁽¹⁾	Total Transformer Capacity ⁽²⁾	Isolated Filter Banks Qty.	Tel/Modem (RJ11)	Coaxial (Type F)	Ethernet (RJ45)				Diagnostic LEDs ⁽³⁾
Isobar Audio/Video Surge Protectors—Metal Housing													
HT10DBS	10 (5-15R) ⁽⁶⁾	8 ft.	Right Angle	3840	6	2	1 line	3 line	1 line	3	\$500,000	Yes	A
ISOBAR6DBS	6 (5-15R)	6 ft.	Right Angle	2850	3	3	1 line	2 line	—	3	\$250,000	Yes	A
Isobar Surge Protectors—Metal Housing													
ISOBAR825ULTRA	8 (5-15R)	25 ft.	Right Angle	3840	4	4	—	—	—	3	\$50,000	Yes	B
ISOTEL8ULTRA	8 (5-15R)	12 ft.	Right Angle	3840	4	4	1 line	—	—	3	\$50,000	Yes	B
ISOBAR8ULTRA	8 (5-15R)	12 ft.	Right Angle	3840	4	4	—	—	—	3	\$50,000	Yes	B
IB8RM ⁽⁷⁾	8 (5-15R)	12 ft.	Right Angle	3840	4	4	—	—	—	—	\$50,000	Yes	B
ISOTEL6ULTRA	6 (5-15R)	6 ft.	Right Angle	3330	4	3	2 line	—	—	3	\$50,000	Yes	B
ISOBAR6ULTRA	6 (5-15R)	6 ft.	Right Angle	3330	4	3	—	—	—	3	\$50,000	Yes	B
ISOBAR6	6 (5-15R)	6 ft.	Right Angle	3330	4	3	—	—	—	3	\$50,000	Yes	B
ISOTEL4ULTRA	4 (5-15R)	6 ft.	Right Angle	3330	2	2	1 line	—	—	3	\$50,000	Yes	B
ISOBAR4ULTRA	4 (5-15R)	6 ft.	Right Angle	3330	2	2	—	—	—	3	\$50,000	Yes	B
IBAR4	4 (5-15R)	6 ft.	Right Angle	3330	2	2	—	—	—	—	\$50,000	Yes	B
ISOBAR2-6	2 (5-15R)	6 ft.	Right Angle	1410	1	1	—	—	—	—	\$25,000	Yes	B
Isobar Surge Protectors with 2 USB-A Charging Ports (3.1A Total)—Metal Housing													
IBAR6ULTRAUSBB	6 (5-15R)	10 ft.	Right Angle	3840	3	4	—	—	—	3	\$50,000	Yes	C
IBAR4ULTRAUSBB	4 (5-15R)	8 ft.	Right Angle	3330	2	3	—	—	—	3	\$50,000	Yes	C
Isobar Direct Plug-In Surge Protectors—Metal Housing													
ULTRABLOK	2 (5-15R)	Direct Plug-In		1410	1	1	—	—	—	3	\$10,000	Yes	D
ISOBLOK2-0	2 (5-15R)	Direct Plug-In		1410	1	1	—	—	—	3	\$10,000	Yes	D
Isobar Hospital-Grade Surge Protector—Metal Housing													
ISOBAR6ULTRAHG	6 (5-15R HG)	15 ft.	Straight 5-15P HG	3330	3	1	—	—	—	3	—	Yes	B
Isobar 230V Surge Protectors—Metal Housing													
ISOBAR4/220	4 (5-15R)	6 ft.	Right Angle	330	2	2	—	—	—	—	—	Yes	B
EURO-4	4 (C13)	6 ft.	C14 inlet ⁽⁸⁾	680	2	2	—	—	—	—	—	Yes	B

All models are certified to meet UL 1449 standards; additional certifications vary by model. All models are rated for 120V AC (50/60 Hz) operation, except ISOBAR4/220 and EURO-4, which are rated for 230V AC (50/60 Hz) operation. Plugs are NEMA 5-15P, unless otherwise indicated. All models have a circuit breaker (either separate or integrated into the on/off switch). Models have an illuminated on/off switch. ISOBAR6ULTRAHG has a switch with a snap-tight cover that reduces the risk of accidental shutoff. Most models have keyhole mounting slots. (1) The joule rating indicates how much surge energy the surge protector can absorb in a single event. A higher rating means more protection. (2) Transformer capacity varies with transformer size. (3) 3 LED models = "Line OK," "Protected" and "Fault." (4) Ultimate Lifetime Insurance is valid in the U.S., Puerto Rico and Canada only. (5) Photos represent housing style only. Refer to the specification chart or visit triplite.eaton.com for exact model features. (6) HT10DBS has color-coordinated outlet/plug labels to coordinate outlets with equipment cords. (7) IB8RM has a switch on a 9 ft. cord for remote outlet control. (8) EURO-4 has a detachable C13-to-C14 cable.

FIND IT FAST! Try our interactive surge protector selector guide at triplite.eaton.com/SPselector





Isobar® Premium Surge Protectors	1
Protect It!® Surge Protectors	2-6
Safe-IT™ Antimicrobial Surge Protectors	7
Rack-Mount Surge Protectors	8

Specialty Surge Protectors (Safety, Eco, Network)	8-9
Power It!™ Power Strips	9-11
Safe-IT Antimicrobial Chargers	11
Safety Series Power Strips	11

Surge Protectors—Plastic Housing





For housing styles E-W, see pages 3-5.

		Data Line Protection & USB Charging													
 	Model	Outlet Qty.	Cord Length	Plug Style	Joules ⁽¹⁾	Total Transformer Capacity ⁽²⁾	Tel/Modem (RJ11)	Coaxial (Type F)	Tel/Ethernet (RJ45)	Diagnostic LEDs ⁽³⁾	Outlet Safety Covers	Housing Color	Ultimate Lifetime Insurance ⁽⁴⁾	Retail Packaging	Housing Style ⁽⁵⁾
Protect It! Surge Protectors—Plastic Housing															
	TLP128TTUSB	12	8 ft.	Right Angle	4320	7	RJ11 1 in/2 out, Coax 1 in/1 out, 2 USB-A Charging Ports (2.1A Total)			PR, GR	—	Black	\$150,000	Yes	A
	TLP1208SAT	12	8 ft.	Right Angle	2880	8	—	1 in/1 out	1 in/2 out ⁽⁶⁾	PR, GR	Built-In	Black	\$250,000	Yes	B
	TLP1208TELV	12	8 ft.	Right Angle	2880	8	1 in/2 out	1 in/1 out	—	PR, GR	Built-In	Black	\$150,000	Yes	B
	TLP1208TEL	12	8 ft.	Right Angle	2160	8	1 in/2 out	—	—	PR, GR	Built-In	Black	\$150,000	Yes	B
	TLP1010USB ⁽⁷⁾	10	10 ft.	Straight	4500	10	2 USB-A Charging Ports (2.4A Total)			PR, GR	—	Black	\$150,000	Yes	C
	TLP1008TELV	10	8 ft.	Right Angle	3345	8	1 in/2 out	1 in/1 out	—	PR, GR	Built-In	Black	\$150,000	Yes	B
	TLP1008TEL	10	8 ft.	Right Angle	2395	8	1 in/2 out	—	—	PR, GR	Built-In	Black	\$150,000	Yes	B
	TLP1006B	10	6 ft.	Right Angle	2880	10	—	—	—	PR, GR	Built-In	Black	\$100,000	Yes	D
	TLP1006USB ⁽⁷⁾	10	6 ft.	Straight	1350	10	2 USB-A Charging Ports (2.4A Total)			PR, GR	—	Black	\$100,000	Yes	C
	TLP810NET	8	10 ft.	Right Angle	3240	6	1 in/1 out	1 in/1 out	1 in/1 out	PR ⁽⁹⁾ , GR	Built-In	Black	\$250,000	Yes	B
	TLP808TELV	8	8 ft.	Right Angle	2160	6	1 in/2 out	1 in/1 out	—	PR ⁽⁹⁾ , GR	Built-In	Black	\$150,000	Yes	B
	TLP808TEL	8	8 ft.	Right Angle	2160	6	1 in/2 out	—	—	PR, GR	Built-In	Light Gray	\$150,000	Yes	B
	TLP825	8	25 ft.	Right Angle	1440	6	—	—	—	PR, GR	Built-In	Light Gray	\$75,000	Yes	B
	TLP808	8	8 ft.	Right Angle	1440	6	—	—	—	PR, GR	Built-In	Light Gray	\$75,000	Yes	B
	TLP808B	8	8 ft.	Right Angle	1440	6	—	—	—	PR, GR	Built-In	Black	\$75,000	Yes	B

Continued on next page

Surge Protectors—Plastic Housing (continued)



					Data Line Protection & USB Charging										
  Model	Outlet Qty.	Cord Length	Plug Style	Joules ⁽¹⁾	Total Transformer Capacity ⁽²⁾	Tel/Modem (RJ11)	Coaxial (Type F)	Tel/Ethernet (RJ45)	Diagnostic LEDs ⁽³⁾	Outlet Safety Covers	Housing Color	Ultimate Lifetime Insurance ⁽⁴⁾	Retail Packaging	Housing Style ⁽⁵⁾	
	Protect It! Surge Protectors—Plastic Housing (continued)														
TLP806TEL	8	6 ft.	Right Angle	2160	5	1 in/1 out	—	—	PR, GR	—	Black	\$150,000	Yes	E	
TLP864USBB	8	6 ft.	Straight	1800	4	4 USB-A Charging Ports (4.2A Total)			PR	—	Black	\$50,000	Yes	F	
TLP88TUSBB	8	8 ft.	Right Angle	1200	6	RJ11 1 in/2 out, 2 USB-A Charging Ports (2.1A Total)			PR	Built-In	Black	\$75,000	Yes	G	
TLP88USBB	8	8 ft.	Right Angle	1200	6	2 USB-A Charging Ports (2.1A Total)			PR	Built-In	Black	\$25,000	Yes	G	
SK6-6 (SUPER8)	8	8 ft.	Right Angle	1080	4	—	—	—	PR, GR, OK	8	Light Gray	\$35,000	Yes	H	
SUPER7TEL15	7	15 ft.	Right Angle	2520	5	1 in/1 out	—	—	PR, GR	—	Light Gray	\$75,000	Yes	I	
SUPER7TEL	7	7 ft.	Right Angle	2520	5	1 in/1 out	—	—	PR, GR	—	Light Gray	\$75,000	Yes	I	
SUPER725B	7	25 ft.	Right Angle	2160	5	—	—	—	PR, GR	—	Black	\$75,000	Yes	I	
SUPER7	7	7 ft.	Right Angle	2160	5	—	—	—	PR, GR	—	Light Gray	\$75,000	Yes	I	
SUPER7B	7	7 ft.	Right Angle	2160	5	—	—	—	PR, GR	—	Black	\$75,000	Yes	I	
TLP706TELC	7	6 ft.	Right Angle	1440	4	1 in/1 out	—	—	PR, GR	Built-In	Black	\$50,000	Yes	J	
SUPER6TEL12	7	12 ft.	Right Angle	1080	5	1 in/1 out	—	—	PR	—	Light Gray	\$50,000	Yes	I	
SUPER6TEL	7	6 ft.	Right Angle	1080	5	1 in/1 out	—	—	PR	—	Light Gray	\$50,000	Yes	I	
TLP707TEL	7	7 ft.	Right Angle	1080	5	1 in/1 out	—	—	PR, GR	Built-In	Silver	\$50,000	Yes	K	
TLP76RBTEL	7	6 ft.	Straight	1080	4	1 in/1 out	—	—	PR	—	Black	\$50,000	Yes	L	
TLP74R	7	4 ft.	Straight	1080	4	—	—	—	PR	—	Light Gray	\$25,000	Yes	L	
TLP74RB	7	4 ft.	Straight	1080	4	—	—	—	PR	—	Black	\$25,000	Yes	L	
TLP725	7	25 ft.	Straight	1080	4	—	—	—	PR	—	Light Gray	\$25,000	Yes	M	
TLP712	7	12 ft.	Straight	1080	4	—	—	—	PR	—	Light Gray	\$25,000	Yes	M	
TLP712B	7	12 ft.	Straight	1080	4	—	—	—	PR	—	Black	\$25,000	Yes	M	
STRIKER	7	6 ft.	Straight	1080	4	—	—	—	PR	—	Light Gray	\$20,000	Yes	M	
TLP616USB ⁽¹⁰⁾	7	6 ft.	Right Angle	900	2	2 USB-A Charging Ports (2.4A Total)			PR	—	White	\$5,000	Yes	N	
TR-6FM	6	6 ft.	Right Angle	3040	3	1 in/1 out	—	—	PR, FA, OK	6	Light Gray	\$50,000	Yes	O	
TR-6	6	6 ft.	Right Angle	2420	3	—	—	—	PR, FA, OK	4	Light Gray	\$50,000	Yes	O	
TLP606UCTOWER	6	8 ft.	Right Angle	1800	3	1 USB-C (3A), 3 USB-A (3.1A Total)			PR	—	Black	\$10,000	Yes	P	
TLP606RNET ⁽⁸⁾	6	6 ft.	Right Angle	1440	4	1 in/1 out (Combo)	1 in/1 out	—	PR, GR	—	Black	\$150,000	Yes	Q	
TLP606SSTELB	6	6 ft.	Right Angle	1440	3	1 in/1 out	—	—	PR	—	Black	\$75,000	Yes	R	
TLP606DMUSB ⁽¹¹⁾	6	6 ft.	Straight	2100	4	2 USB Charging Ports (2.1A Total)			PR, GR	—	Black	\$40,000	Yes	S	
TLP608RUSBB ⁽⁸⁾	6	8 ft.	Straight	1080	6	2 USB Charging Ports (3.4A Total)			PR, GR	—	Black	\$50,000	Yes	T	

Continued on next page

Surge Protectors—Plastic Housing (continued)



For housing styles X-RR, see pages 5-6.

							Data Line Protection & USB Charging							
 	Outlet Qty.	Cord Length	Plug Style	Joules ⁽¹⁾	Total Transformer Capacity ⁽²⁾	Tel/Modem (RJ11)	Coaxial (Type F)	Tel/Ethernet (RJ45)	Diagnostic LEDs ⁽³⁾	Outlet Safety Covers	Housing Color	Ultimate Lifetime Insurance ⁽⁴⁾	Retail Packaging	Housing Style ⁽⁵⁾
Protect It! Surge Protectors—Plastic Housing (continued)														
TLP648USBC ⁽¹¹⁾	6	8 ft.	Straight	1080	2	1 USB-C (3A), 2 USB-A (4.8A Total)			PR	—	Light Gray	\$50,000	Yes	U
TLP66USBR	6	6 ft.	Straight	1080	4	4 USB-A Charging Ports (3.4A Total)			PR	—	Black	\$50,000	Yes	V
TLP608	6	8 ft.	Right Angle	990	3	—	—	—	PR	—	Light Gray	\$20,000	Yes	W
TLP608TEL	6	8 ft.	Straight	990	3	1 in/1 out	—	—	PR	—	Light Gray	\$20,000	Yes	W
TLP606USB	6	6 ft.	Straight	990	3	2 USB Charging Ports (2.1A Total)			PR	—	Light Gray	\$20,000	Yes	W
TLP606USBB	6	6 ft.	Straight	990	3	2 USB Charging Ports (2.1A Total)			PR	—	Black	\$20,000	Yes	W
TLP64USBRA15	6	15 ft.	Right Angle	900	4	4 USB-A Charging Ports (4.2A Total)			PR	—	White	\$25,000	Yes	F
TLP664USBB	6	6 ft.	Straight	900	4	4 USB-A Charging Ports (4.2A Total)			PR	—	Black	\$25,000	Yes	F
TLP615	6	15 ft.	Straight	790	3	—	—	—	PR	—	Light Gray	\$20,000	Yes	W
TLP615B	6	15 ft.	Straight	790	3	—	—	—	PR	—	Black	\$20,000	Yes	W
TLP606	6	6 ft.	Straight	790	3	—	—	—	PR	—	Light Gray	\$20,000	Yes	W
TLP606B	6	6 ft.	Straight	790	3	—	—	—	PR	—	Black	\$20,000	Yes	W
TLP604TEL	6	4 ft.	Straight	790	3	1 in/1 out	—	—	PR	—	Light Gray	\$20,000	Yes	W

Continued on next page

Surge Protectors—Plastic Housing (continued)

Model	Outlet Qty.	Cord Length	Plug Style	Joules ⁽¹⁾	Total Transformer Capacity ⁽²⁾	Data Line Protection & USB Charging			Diag-nostic LEDs ⁽³⁾	Outlet Safety Covers	Housing Color	Ultimate Lifetime Insurance ⁽⁴⁾	Retail Pack-aging	Housing Style ⁽⁵⁾
						Tel/Modem (RJ11)	Coaxial (Type F)	Tel/ Ethernet (RJ45)						
Protect It! Surge Protectors—Plastic Housing (continued)														
TLP604	6	4 ft.	Straight	790	3	—	—	—	PR	—	Light Gray	\$20,000	Yes	W
TLP6B	6	6 ft.	Straight	360	3	—	—	—	PR	—	Black	\$10,000	Yes	W
TLP602	6	2 ft.	Straight	180	3	—	—	—	—	—	Light Gray	\$2,500	Yes	W
SPIKESTIK	6	6 ft.	Straight	540	3	—	—	—	PR	6	Light Gray	\$20,000	Yes	X
TLP66USB	5	6 ft.	Right Angle	1200	5	3 USB-A Charging Ports (3.1A Total)			PR, GR	—	White	\$7,500	Yes	Y
TLP406USBUFO	4	6 ft.	Right Angle	1800	4	4 USB-A Charging Ports (4.2A Total)			PR, GR	—	Black	\$2,500	Yes	Z
TLP48USBCUFO	4	8 ft.	Straight	1080	4	3 USB-A (4.8A Total) and 1 USB-C (3A) Charging Ports, Built-In Micro-USB Cord			PR	—	Gray	\$100,000	Yes	AA
TLP404	4	4 ft.	Straight	450	2	—	—	—	PR	—	Light Gray	\$1,000	Yes	W
TLP36USB	3	6 ft.	Straight	540	3	4 USB-A Charging Ports (4.8A Total)			PR	—	Black	\$10,000	Yes	BB
TLP366CUBEUSBB	3 ⁽¹²⁾	6 ft.	Right Angle	540	2	6 USB-A Charging Ports (7.2A Total)			PR	—	Black	\$50,000	Yes	CC
TLP206USB	2	6 ft.	Right Angle	450	1	2 USB-A Charging Ports (2.1A Total)			PR	—	Black	\$1,000	Yes	DD
TLP104USB	1	4 ft.	Right Angle	450	1	2 USB-A Charging Ports (2.1A Total)			PR	—	Black	\$1,000	Yes	DD
Protect It! Direct Plug-In Surge Protectors—Plastic Housing														
SWIVEL6 ⁽⁸⁾	6	Direct Plug-In		1500	4	—	—	—	PR, GR	—	Black	\$20,000	Yes	EE
SWIVEL6USB ⁽⁸⁾	6	Direct Plug-In		1200	2	2 USB-A Charging Ports (3.1A Total)			PR, GR	—	Black	\$20,000	Yes	EE
TLP6SLUSBB	6	Direct Plug-In		1050	2	2 USB-A Charging Ports (3.4A Total)			PR, GR	—	Black	\$20,000	Yes	FF
SK6-0	6	Direct Plug-In		540	4	—	—	—	PR	—	Light Gray	\$10,000	Yes	GG
SK6-0B	6	Direct Plug-In		540	4	—	—	—	PR	—	Black	\$10,000	Yes	GG
SK62USBC	6	Direct Plug-In		490	4	1 USB-A and 1 USB-C Charging Ports (4A Total)			PR	—	Black	\$20,000	Yes	HH
SK5TEL-0	5	Direct Plug-In		1080	4	1 in/1 out	—	—	PR, GR	—	Light Gray	\$15,000	Yes	GG
TLP4BK	4	Direct Plug-In		720	3	—	—	—	PR, GR	—	Black	\$10,000	Yes	II
SK40RUSBB ⁽⁸⁾	4	Direct Plug-In		1080	4	2 USB-A Charging Ports (3.4A Total)			PR	—	Black	\$25,000	Yes	JJ
SK3-0	3	Direct Plug-In		660	2	—	—	—	PR, GR	—	Light Gray	\$5,000	Yes	GG
SK30USB	3	Direct Plug-In		540	2	2 USB-A Charging Ports (2.1A Total)			PR	—	Black	\$5,000	Yes	KK
Protect It! Permanent-Mount (UL 962A) Surge Protectors—Plastic Housing														
TLP310MUSB ⁽¹³⁾	3	10 ft.	Straight	900	2	2 USB-A Charging Ports (2.4A Total)		1 in/1 out	—	—	Black	\$20,000	Yes	LL
TLP310USBC ⁽¹¹⁾	3	10 ft.	Straight	510	3	2 USB-A Charging Ports (3.1A Total)			—	—	Black	\$20,000	Yes	MM
TLP310USBCW ⁽¹¹⁾	3	10 ft.	Straight	510	3	2 USB-A Charging Ports (3.1A Total)			—	—	White	\$20,000	Yes	MM
TLP310USBS ⁽¹⁴⁾	3	10 ft.	Straight	510	3	2 USB-A Charging Ports (3.1A Total)			—	—	Black	\$20,000	Yes	NN
Protect It! Desktop USB Charging Station with Two-Outlet Surge Protector—Plastic Housing														
TLP26USBB	2	6 ft.	Right Angle	1080	1	4 USB-A Charging Ports (4.8A Total)			PR, GR	—	Black	\$50,000	Yes	OO


Continued on next page

Surge Protectors—Plastic Housing (continued)

						Data Line Protection & USB Charging								
UL Model	Outlet Qty.	Cord Length	Plug Style	Joules ⁽¹⁾	Total Transformer Capacity ⁽²⁾	Tel/Modem (RJ11)	Coaxial (Type F)	Tel/Ethernet (RJ45)	Diagnostic LEDs ⁽³⁾	Outlet Safety Covers	Housing Color	Ultimate Lifetime Insurance ⁽⁴⁾	Retail Packaging	Housing Style ⁽⁵⁾
Protect It! Mobile Surge Protectors—Plastic Housing														
TRAVELER3USB	3	18 in.	Right Angle	1050	2	2 USB Charging Ports (2.1A Total)			PR	—	Black	\$25,000	Yes	PP
TRAVELER	2	Direct Plug-In (Retractable)		1050	2	1 in/1 out	—	—	PR, GR	—	Black	\$50,000	Yes	QQ
TRAVELER100BT	2	Direct Plug-In (Retractable)		1050	2	—	—	1 in/1 out	PR, GR	—	Black	\$50,000	Yes	QQ
TRAVELCUBE	1	Direct Plug-In		1080	1	1 in/2 out	—	—	PR, GR	—	Light Gray	\$10,000	Yes	RR
SPIKECUBE	1	Direct Plug-In		600	1	—	—	—	PR, GR	—	Light Gray	\$5,000	Yes	RR

All models are certified to meet UL 1449 standards; additional certifications vary by model. All models are compatible with standard 120V operation. Outlets are NEMA 5-15R, unless otherwise indicated. Plugs are NEMA 5-15P, unless otherwise indicated. Most models include a 15A circuit breaker. Most models have an illuminated on/off switch or button, except TLP1008TELV, TLP1008TEL, TLP1006B, SUPER series models (not SUPER8), TLP606SSTELB, TLP648USBC, TLP66USB, TLP48USBCUFO, TLP606UCTOWER and TLP406USBUFO have an unlighted switch or button. Bench-mount models have a switch with a snap-tight cover. Direct plug-in models, permanent-mount models, TLP36USB, TLP366CUBEUSBB, TLP206USB, TLP104USB, TLP26USBB and mobile models do not have a switch or button. Most models have keyhole slots, flanges or adjustable brackets for mounting. (1) The joule rating indicates how much surge energy the surge protector can absorb in a single event. A higher rating means more protection. (2) Transformer capacity varies with transformer size. (3) PR = Protected, GR = Grounded, PW = Power, FA = Fault, OK = Line OK. (4) Ultimate Lifetime Insurance is valid in the U.S., Puerto Rico and Canada only. (5) Photos represent housing style only. Refer to the specification chart. (7) Swivel light bars with on/off switch provide 1000 lumens each. (8) SWIVEL6 and SWIVEL6USB have 3 fixed outlets and 3 outlets (one group of 3 outlets) that rotate 90°. TLP606RNET has 2 fixed outlets and 4 outlets that rotate 90°. TLP608RUSBB has 6 outlets that rotate 90°. SK40RUSBB has 4 outlets that rotate 90°. (9) Includes an audible alarm that sounds if the "Protected" LED goes out. (10) TLP616USB has a detachable plug that is a USB charger with an AC outlet. (11) Clamps to a flat surface. (12) Third outlet is usable when the top portion (USB wall charger) is removed. (13) Fits in 2 1/2" dia. cutouts. (14) Includes mounting brackets.

Surge Protectors—Metal Housing

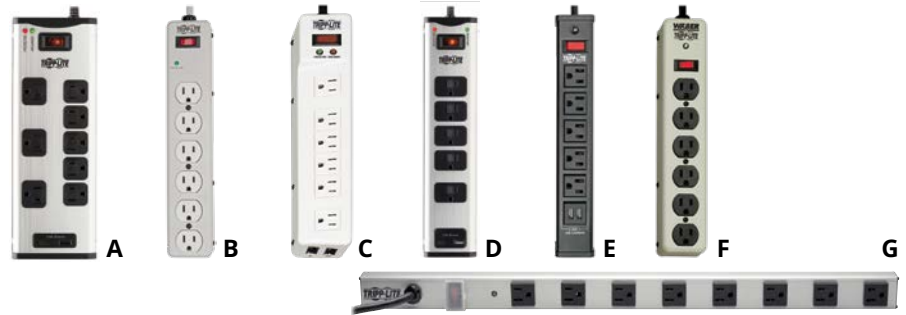

						Data Line Protection & USB Charging								
UL Model	Outlet Qty.	Cord Length	Plug Style	Joules ⁽¹⁾	Total Transformer Capacity ⁽²⁾	Tel/Modem (RJ11)	Coaxial (Type F)	Tel/Ethernet (RJ45)	Diagnostic LEDs ⁽³⁾	Outlet Safety Covers	Housing Color	Ultimate Lifetime Insurance ⁽⁴⁾	Retail Packaging	Housing Style ⁽⁵⁾
Surge Protectors—Metal Housing														
TLM88USBC	8	8 ft.	Straight	2100	1	1 USB-A, 1 USB-C Charging Ports (3.9A Total)			PR, GR	Built-In	Silver	\$25,000	Yes	A
TLM606HJ	6	6 ft.	Straight	1340	3	—	—	—	PR	—	Light Gray	\$75,000	Yes	B
TLM626TEL15	6	15 ft.	Straight	1340	4	1 in/1 out	—	—	PR, GR	—	Light Gray	\$75,000	Yes	C
TLM626	6	6 ft.	Straight	1340	4	—	—	—	PR, GR	—	Light Gray	\$75,000	Yes	C
TLM506USBC	5	6 ft.	Straight	2100	1	1 USB-A, 1 USB-C Charging Ports (3.9A Total)			PR, GR	Built-In	Silver	\$25,000	Yes	D
TLM526USBB	5	6 ft.	Straight	450	3	2 USB-A Charging Ports (3.4A Total)			—	—	Black	\$10,000	Yes	E
TLM446USBB	4	6 ft.	Straight	450	4	4 USB-A Charging Ports (4.2A Total)			—	—	Black	\$10,000	Yes	E
Industrial Surge Protectors—Metal Housing														
DG206	6	6 ft.	Straight	1050	3	—	—	—	PR	—	Light Gray	—	No	F
PM6NS	6	6 ft.	Straight	900	3	—	—	—	PR	—	Light Gray	—	No	F
Commercial Surge Protector—Metal Housing														
PM6SN1	6	6 ft.	Straight	900	3	—	—	—	PR	—	Light Gray	—	No	F
Bench/Cabinet-Mount Surge Protectors—Metal Housing														
SS7619-15	24	15 ft.	Straight	1650	24	—	—	—	PR	6	Silver	—	No	G
SS7415-15	16	15 ft.	Straight	1650	16	—	—	—	PR	6	Silver	—	No	G
SS3612	12	15 ft.	Straight	1050	12	—	—	—	PR	6	Silver	—	No	G
SS361220	12 ⁽⁶⁾	15 ft.	Straight	1650	12	—	—	—	PR	6	Silver	—	No	G
SS240806	8	6 ft.	Straight	1050	8	—	—	—	PR	6	Silver	—	No	G
SS480806	8	6 ft.	Straight	1650	8	—	—	—	PR	6	Silver	—	No	G

All models are certified to meet UL 1449 standards; additional certifications vary by model. All models are compatible with standard 120V operation. Outlets are NEMA 5-15R, unless otherwise indicated. Plugs are NEMA 5-15P, unless otherwise indicated. Most models include a 15A circuit breaker. All models have an illuminated on/off switch. Bench-mount models have a switch with a snap-tight cover. Most models have keyhole slots, flanges or adjustable brackets for mounting. (1) The joule rating indicates how much surge energy the surge protector can absorb in a single event. A higher rating means more protection. (2) Transformer capacity varies with transformer size. (3) PR = Protected, GR = Grounded. (4) Ultimate Lifetime Insurance is valid in the U.S., Puerto Rico and Canada only. (5) Photos represent housing style only. Refer to the specification chart or visit tripplite.eaton.com for exact model features. (6) SS361220 has a NEMA 5-20P plug, 10 NEMA 5-15R outlets and 2 NEMA 5-15/20R outlets.

Safe-IT Surge Protectors

Safe-IT™
AntiMICROBIAL
PRODUCTS



Model	Outlet Qty.	Cord Length	Plug Style	Joules ⁽¹⁾	Total Transformer Capacity ⁽²⁾	USB Charging Ports	Diagnostic LEDs ⁽³⁾	Outlet Safety Covers	Housing Color	Ultimate Lifetime Insurance ⁽⁴⁾	Retail Packaging	Housing Style ⁽⁵⁾
Safe-IT Surge Protectors—Antimicrobial Plastic Housing												
TLP608DMUAM ⁽⁶⁾	6	8 ft.	Straight	2100	3	2 USB-A Charging Ports (2.4A Total)	PR, GR	—	Black	\$40,000	Yes	A
TLP648UCBAM ⁽⁶⁾	6	8 ft.	Straight	1080	2	1 USB-C (3A) and 2 USB-A (2.4 Total) Charging Ports	PR	—	Black	\$50,000	Yes	B
TLP68UBAM ⁽⁷⁾	6	8 ft.	Straight	1080	4	4 USB-A Charging Ports (3.4A Total)	PR	—	Black	\$50,000	Yes	C
TLP610BUAM	6	10 ft.	Straight	990	2	2 USB-A Charging Ports (2.4A Total)	PR	—	Black	\$25,000	Yes	D
TLP610COILAM	6	10 ft. Coiled	Right Angle	300	—	—	—	—	Black	\$10,000	Yes	E
TLP410UCUFOAM ⁽⁸⁾	4	10 ft.	Straight	1080	4	1 USB-C (3A) and 3 USB-A (4.8A Total) Charging Ports, Built-In Micro-USB Cord	PR	—	White	\$100,000	Yes	F
TLP368CUBEUAM	3 ⁽⁹⁾	8 ft.	Right Angle	540	2	6 USB-A Charging Ports (Top 4, 4.8A Total; Bottom 2, 2.4A Total)	PR	—	Black	\$50,000	Yes	G
TLP38UAM	3	8 ft.	Straight	540	3	4 USB-A Charging Ports (4.8A Total)	PR	—	Black	\$10,000	Yes	H
TLP28PD57WCAM	2	8 ft.	Right Angle	300	2	1 USB-C (3A) and 2 USB-A (4.8A Total) Charging Ports (57W Max)	—	—	White	\$25,000	Yes	I
TLP26PD30WCAM	2	6 ft.	Right Angle	300	2	1 USB-C (3A) and 2 USB-A (4.8A Total) Charging Ports (30W Max)	—	—	White	\$25,000	Yes	I
TLP12POAM ⁽¹⁰⁾	1	10 ft.	Right Angle	1000	1	2 USB-A Charging Ports (4.2A Total)	—	—	Black	\$15,000	Yes	J
Safe-IT Direct Plug-In Surge Protectors—Antimicrobial Plastic Housing												
SK5BUCAM ⁽⁸⁾	5	Direct Plug-In		1050	4	1 USB-C and 1 USB-A (3.9A Total)	PR	—	Black	\$25,000	Yes	K
SK3BUAM	3	Direct Plug-In		1050	1	2 USB-A Charging Ports (2.4A Total)	PR	—	Black	\$5,000	Yes	L
Safe-IT Surge Protectors—Metal Housing with Antimicrobial Coating												
TLM610CPAM	6	10 ft.	Straight	1000	3	1 USB-C (60W) and 4 USB-A (2x 2.4A, 2x 2.1A) Charging Ports; 3 Wireless Charging Pockets (3x 3.1A)	—	—	Black	\$50,000	No	M
TLM210CAM	2	10 ft.	Right Angle	1000	2	2 USB-C (x2 60W) and 4 USB-A (2x 2.4A, 2x 2.1A) Charging Ports	—	—	Black	\$50,000	No	N

All models are certified to meet UL 1449 standards; additional certifications vary by model. All models have antimicrobial protection that aids in resisting the growth of bacteria, viruses, fungi, mold and mildew. All models are compatible with standard 120V operation. Outlets are NEMA 5-15R, unless otherwise indicated. Plugs are NEMA 5-15P, unless otherwise indicated. Most models include a 15A circuit breaker. TLP608DMUAM, TLP610BUAM and TLP610COILAM have an illuminated on/off switch. TLP648UCBAM, TLP68UBAM and TLP410UCUFOAM have an unlighted switch. TLP28PD57WCAM and TLP26PD30WCAM have a power button. TLP368CUBEUAM, TLP38UAM, TLP12POAM, direct plug-in models and models with a metal housing do not have a switch. (1) The joule rating indicates how much surge energy the surge protector can absorb in a single event. A higher rating means more protection. (2) Transformer capacity varies with transformer size. (3) PR = Protected, GR = Grounded. (4) Ultimate Lifetime Insurance is valid in the U.S., Puerto Rico and Canada only. (5) Photos represent housing style only. Refer to the specification chart or visit triplite.eaton.com for exact model features. (6) Clamps to a flat surface. (7) Retractable USB charger clamps to a flat surface. (8) TLP410UCUFOAM has 4 rotating outlets and accommodates a smart speaker. SK5BUCAM has 1 fixed outlet and 4 outlets (two groups of 2) that rotate 90°. (9) Third outlet is usable when the top portion (USB wall charger) is removed. (10) Fits in 3" dia. cutouts.

Rack-Mount Surge Protectors




Model	Outlet Qty. (NEMA Type)		Cord Length	Plug Type	Plug Style	Joules ⁽¹⁾	Total Transformer Capacity ⁽²⁾	Isolated Filter Banks Qty.	Diagnostic LEDs ⁽³⁾	Ultimate Lifetime Insurance ⁽⁴⁾	Retail Packaging	Housing Style ⁽⁵⁾
	Front	Rear										
Isobar Rack-Mount Premium Surge Protectors (1U)—Metal Housing												
ISOBAR12ULTRA	2 (5-15R)	10 (5-15R)	15 ft.	5-15P	Straight	3840	6	2	3	\$25,000	No	A
IBAR12	2 (5-15R)	10 (5-15R)	15 ft.	5-15P	Straight	3840	6	2	3	\$25,000	No	A
IBAR12-20ULTRA	2 (5-15R)	10 (5-20R)	15 ft.	5-20P	Straight	3840	6	1	3	\$25,000	No	A
IBAR12-20T	2 (5-15R)	10 (5-20R)	15 ft.	L5-20P	Straight	3840	6	1	3	\$25,000	No	A

Protect It! Rack-Mount Surge Protector (1U)—Metal Housing

DRS-1215	6 (5-15R)	8 (5-15R)	15 ft.	5-15P	Straight	3000	7	0	1	—	No	A
----------	-----------	-----------	--------	-------	----------	------	---	---	---	---	----	---

All models are certified to meet UL 1449 standards; additional certifications vary by model. All models are rated for 120V AC (50/60 Hz) operation. All models have a circuit breaker(s), illuminated on/off switch with snap-tight cover and removable mounting flanges. **(1)** The joule rating indicates how much surge energy the surge protector can absorb in a single event. A higher rating means more protection. **(2)** Transformer capacity varies with transformer size. **(3)** 1 LED model = "Protected." 3 LED models = "Line OK," "Protected" and "Fault." **(4)** Ultimate Lifetime Insurance is valid in the U.S., Puerto Rico and Canada only. **(5)** Photos represent housing style only. Refer to the specification chart or visit tripplite.eaton.com for exact model features.

Safety Series & Eco-Surge Surge Protectors

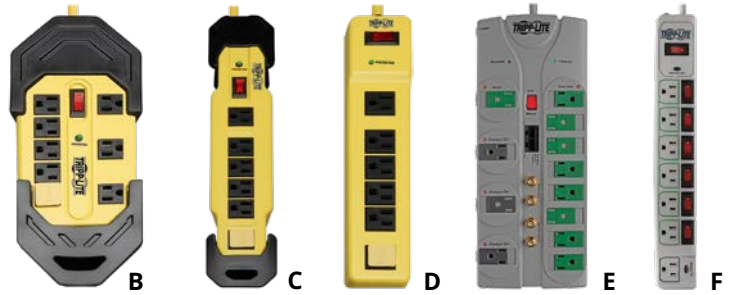


Model	Outlet Qty.	Cord Length	Plug Style	Joules ⁽¹⁾	Total Transformer Capacity ⁽²⁾	Diagnostic LEDs ⁽³⁾	Special Features	Outlet Safety Covers	Housing Color	Ultimate Lifetime Insurance ⁽⁴⁾	Retail Packaging	Housing Style ⁽⁵⁾
Protect It! Safety Series Surge Protectors—Metal Housing												
TLM825SA	8	25 ft.	Straight	3900	6	PR	Cord Clip, Cord Wrap w/Hanger	4	Yellow	\$100,000	Yes	B
TLM812SA	8	12 ft.	Straight	1500	6	PR	Cord Clip, Cord Wrap w/Hanger	4	Yellow	\$50,000	Yes	B
TLM615SA	6	15 ft.	Straight	2700	4	PR	Cord Clip, Cord Wrap w/Hanger	4	Yellow	\$75,000	Yes	C
TLM609SA	6	9 ft.	Straight	1500	4	PR	Cord Clip, Cord Wrap w/Hanger	4	Yellow	\$50,000	Yes	C
TLM626SA	6	6 ft.	Straight	900	4	PR	—	4	Yellow	\$10,000	Yes	D

Eco-Surge Energy-Saving Surge Protectors—Plastic Housing

TLP1210SATG ⁽⁶⁾	12	10 ft.	Right Angle	3600	8	PR, GR	Master Device Outlet Control	Built-In	Gray	\$250,000	Yes	E
TLP808NETG ⁽⁷⁾	8	8 ft.	Right Angle	2160	6	PR, GR	Master Device Outlet Control	Built-In	Gray	\$150,000	Yes	E
TLP76MSG	7	6 ft.	Straight	1080	4	PR	6 Individually Switched Outlets	—	Gray	\$25,000	Yes	F
TLP76MSGB	7	6 ft.	Straight	1080	4	PR	6 Individually Switched Outlets	—	Black	\$25,000	Yes	F

All models are certified to meet UL 1449 standards; additional certifications vary by model. Safety series models comply with OSHA safety color code standards. All models are compatible with standard 120V operation. Outlets are NEMA 5-15R. Plugs are NEMA 5-15P. All models have a 15A circuit breaker and an illuminated on/off switch. Models have keyhole mounting. **(1)** The joule rating indicates how much surge energy the surge protector can absorb in a single event. A higher rating means more protection. **(2)** Transformer capacity varies with transformer size. **(3)** PR = Protected, GR = Grounded. **(4)** Ultimate Lifetime Insurance is valid in the U.S., Puerto Rico and Canada only. **(5)** Photos represent housing style only. Refer to the specification chart or visit tripplite.eaton.com for exact model features. **(6)** TLP1210SATG includes coaxial (Type F, 2 in/2 out) and tel/Ethernet (RJ45, 1 in/1 out) line protection. **(7)** TLP808NETG includes tel/Ethernet (RJ45, 1 in/1 out) line protection.

DataShield™ In-Line Surge Protectors



Model	Input Connection	Output Connection	Description	Clamping Voltage (RMS)	Circuit Breaker	Housing Material	Housing Color	Retail Packaging	Housing Style ⁽⁵⁾
DB9 ⁽⁸⁾	DB9 Serial	DB9 Serial	Protects DB9 serial ports	18V	340A	Plastic	Putty	No	G
DNET1	RJ45 Male	RJ45 Female	Protects network and phone lines (10/100Base-T, token ring applications)	7.5V	750A	Plastic	Putty	No	H
DSUT1CSU	RJ45 Male	RJ45 Female	Protects T1 and ISDN (RJ11/45/48) lines	60V	200A	Plastic	Putty	No	H
DTEL2	RJ11/RJ45 Male	RJ11/RJ45 Female	Protects up to 2 network or phone lines	260V	250A	Plastic	Putty	No	I

(5) Photos represent housing style only. Refer to the specification chart or visit tripplite.eaton.com for exact model features. **(8)** Reversible for use with male or female captive DB9 ports.

In-Line Surge Protectors



Model	Input Connection	Output Connection	Signal Range	Description	Housing Color	Retail Packaging	Housing Style ⁽⁵⁾
In-Line Network Surge Protectors—Metal Housing							
B110-SP-CAT	RJ45 Female	RJ45 Female	300 ft.	Protects network equipment (2 needed to protect both source and device); 10 Gbps	Black	No	A
B110-SP-10G	RJ45 Female	RJ45 Female	330 ft.	Protects network equipment (2 needed to protect both source and device); 10 Gbps	Black	No	B
In-Line PoE Surge Protector—Metal Housing							
B110-SP-POE	RJ45 Female	RJ45 Female	300 ft.	Protects PoE equipment (2 needed to protect both source and device); 1 Gbps	Black	No	A
In-Line HDMI Surge Protector—Metal Housing							
B110-SP-HDMI	HDMI Female	HDMI Female	3 ft.	Protects HDMI equipment (2 needed to protect source and device); 4K	Black	No	C
Outdoor In-Line Surge Protectors—Plastic Housing							
B110-SP-CAT-OD	RJ45 Female	RJ45 Female	328 ft.	Protects edge network devices (2 needed to protect source and device); IP66 rated	Light Gray	No	D
B110-SP-CAT-OD2	RJ45 Female	RJ45 Female	328 ft.	Protects edge network devices (2 needed to protect source and device); IP68 rated	White	No	E

(5) Photos represent housing style only. Refer to the specification chart or visit tripplite.eaton.com for exact model features.

Power Strips




For additional models, see next page.

Model	Outlet Qty. (NEMA Type)	Cord Length	NEMA Plug Type (Style)	Total Transformer Capacity ⁽¹⁾	Circuit Breaker	Illuminated On/Off Switch ⁽²⁾	Housing Color	Retail Packaging	Housing Style ⁽³⁾
Power It! Home/Office Power Strips—Plastic Housing									
PS725B	7 (5-15R)	25 ft.	5-15P (Straight)	4	15A	Yes	Black	Yes	A
PS712B	7 (5-15R)	12 ft.	5-15P (Straight)	4	15A	Yes	Black	Yes	A
PS615	6 (5-15R)	15 ft.	5-15P (Straight)	3	15A	Yes	Light Gray	Yes	A
PS66B	6 (5-15R)	6 ft.	5-15P (Straight)	3	15A	Yes	Black	Yes	A
PS410	4 (5-15R)	10 ft.	5-15P (Straight)	2	15A	Yes	Light Gray	Yes	A
Industrial Power Strip—Plastic Housing									
PS6	6 (5-15R)	4 ft.	5-15P (Straight)	3	15A	Yes	Light Gray	No	A
Power It! Home/Office Power Strips—Metal Housing									
TLM1015NC	10 (5-15R) ⁽⁴⁾	15 ft.	5-15P (Straight)	5	15A	Yes	Light Gray	Yes	B
TLM915NC	9 (5-15R)	15 ft.	5-15P (Straight)	5	15A	Yes	Light Gray	Yes	C
TLM615NC	6 (5-15R)	15 ft.	5-15P (Straight)	3	15A	Yes	Light Gray	Yes	D
TLM615NCRA	6 (5-15R) ⁽⁴⁾	15 ft.	5-15P (Straight)	6	15A	Yes	Light Gray	Yes	D
TLM615NC20	6 (5-20R) ⁽⁵⁾	15 ft.	5-20P (Straight)	3	20A	Yes	Light Gray	Yes	D
TLM606NC	6 (5-15R)	6 ft.	5-15P (Straight)	3	15A	Yes	Light Gray	Yes	D
TLM406NC	4 (5-15R)	6 ft.	5-15P (Straight)	2	15A	Yes	Light Gray	Yes	D
TLM306NC	3 (5-15R)	6 ft.	5-15P (Straight)	2	15A	Yes	Light Gray	Yes	D

Continued on next page


Power Strips (continued)

 Model	Outlet Qty. (NEMA Type)	Cord Length	NEMA Plug Type (Style)	Total Transformer Capacity ⁽¹⁾	Circuit Breaker	Illuminated On/Off Switch ⁽²⁾	Housing Color	Retail Packaging	Housing Style ⁽³⁾
Bench/Cabinet-Mount Power Strips—Metal Housing									
PS7224	24 (5-15R)	15 ft.	5-15P (Straight)	24	15A	Yes	Silver	No	F
PS7224-20	22 (5-15R), 2 (5-20R) ⁽⁵⁾	15 ft.	5-20P (Straight)	24	20A	Yes	Silver	No	F
PS7224-20HW	22 (5-15R), 2 (5-20R) ⁽⁵⁾	—	Hardwire	24	—	Switchless	Putty	No	G
PS7224-20T	22 (5-15R), 2 (5-20R) ⁽⁵⁾	15 ft.	L5-20P (Straight)	24	20A	Yes	Silver	No	F
PS6020	20 (5-15R)	15 ft.	5-15P (Straight)	20	15A	Yes	Silver	No	F
PS4816	16 (5-15R)	15 ft.	5-15P (Straight)	16	15A	Yes	Silver	No	F
PS4816B	16 (5-15R)	15 ft.	5-15P (Straight)	16	15A	Yes	Black	No	F
PS3612	12 (5-15R)	15 ft.	5-15P (Straight)	12	15A	Yes	Silver	No	F
PS3612B	12 (5-15R)	15 ft.	5-15P (Straight)	12	15A	Yes	Black	No	F
PS3612-20HW	10 (5-15R), 2 (5-20R) ⁽⁵⁾	—	Hardwire	12	—	Switchless	Putty	No	G
PS361206	12 (5-15R)	6 ft.	5-15P (Straight)	12	15A	Yes	Silver	No	F
PS361220	10 (5-15R), 2 (5-20R) ⁽⁵⁾	15 ft.	5-20P (Straight)	12	20A	Yes	Silver	No	F
PS3612RA	12 (5-15R) ⁽⁴⁾	15 ft.	5-15P (Right Angle)	12	15A	Yes	Silver	No	F
PS2408	8 (5-15R)	15 ft.	5-15P (Straight)	8	15A	Yes	Silver	No	F
PS2408B	8 (5-15R)	15 ft.	5-15P (Straight)	8	15A	Yes	Black	No	F
PS240810	8 (5-15R)	10 ft.	5-15P (Straight)	8	15A	Yes	Silver	No	F
PS2408RA	8 (5-15R) ⁽⁴⁾	15 ft.	5-15P (Right Angle)	8	15A	Yes	Silver	No	F
PS2406RA08B	6 (5-15R) ⁽⁴⁾	8 ft.	5-15P (Right Angle)	6	15A	Yes	Black	No	F
PS120406	4 (5-15R)	6 ft.	5-15P (Straight)	2	15A	Yes	Silver	No	F
PS120410	4 (5-15R)	10 ft.	5-15P (Straight)	2	15A	Yes	Silver	No	F
PS120420	2 (5-15R), 2 (5-20R) ⁽⁵⁾	15 ft.	5-20P (Straight)	2	20A	Yes	Silver	No	F
PS240406	4 (5-15R)	6 ft.	5-15P (Straight)	4	15A	Yes	Silver	No	F
PS2404RA06B	4 (5-15R) ⁽⁴⁾	6 ft.	5-15P (Right Angle)	4	15A	Yes	Black	No	F
Industrial Power Strips—Metal Housing									
UL800CB-15	10 (5-15R) ⁽⁴⁾	15 ft.	5-15P (Straight)	5	15A	Yes	Black	No	B
UL17CB-15	9 (5-15R)	15 ft.	5-15P (Right Angle)	4	15A	Yes	Dark Gray	No	C
UL24CB-15	6 (5-15R)	15 ft.	5-15P (Right Angle)	3	15A	Yes	Dark Gray	No	D
UL24RA-15	6 (5-15R) ⁽⁴⁾	15 ft.	5-15P (Right Angle)	3	15A	Yes	Dark Gray	No	D
UL620-15	6 (5-15/20R) ⁽⁵⁾	15 ft.	5-20P (Straight)	3	20A	Yes	Dark Gray	No	D
6SP	6 (5-15R)	6 ft.	5-15P (Straight)	3	15A	Yes	Dark Gray	No	D
6NX6	6 (5-15R)	6 ft.	5-15P (Straight)	3	15A	Yes	Light Gray	No	D
6SPDX-15	6 (5-15R)	15 ft.	5-15P (Straight)	3	15A	Yes	Light Gray	No	D
6SPDX	6 (5-15R)	6 ft.	5-15P (Straight)	3	15A	Yes	Light Gray	No	D
602-15	5 (5-15R)	15 ft.	5-15P (Straight)	3	15A	Switchless	Light Gray	No	E
602	5 (5-15R)	6 ft.	5-15P (Straight)	3	15A	Switchless	Dark Gray	No	E
UL603CB-6	4 (5-15R)	6 ft.	5-15P (Straight)	2	15A	Yes	Dark Gray	No	D
4SPDX	4 (5-15R)	6 ft.	5-15P (Straight)	2	15A	Yes	Light Gray	No	D
3SP	3 (5-15R)	6 ft.	5-15P (Straight)	2	15A	Yes	Light Gray	No	D
3SP9	3 (5-15R)	9 ft.	5-15P (Straight)	2	15A	Yes	Light Gray	No	D
Rack-Mount AC Charger Power Strip (1U)—Metal Housing									
PS1916D1U	16 (5-15R Dongles)	15 ft.	5-15P (Straight)	16	15A	Yes	Black	No	H

All models are certified to meet UL standards; additional certifications vary by model. All models are compatible with standard 120V operation. Most models have keyhole slots, flanges or adjustable brackets for mounting. **(1)** Transformer capacity varies with transformer size. **(2)** Most models have a snap-tight cover that reduces the risk of accidental shutoff. Visit triplite.eaton.com for exact model features. **(3)** Photos represent housing style only. Refer to the specification chart or visit triplite.eaton.com for exact model features. **(4)** Right-angle outlets. **(5)** NEMA 5-20R outlets support NEMA 5-15P and NEMA 5-20P plugs.

Continued on next page

Power Strips (continued)

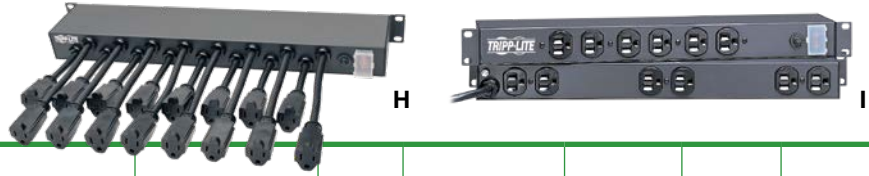

For housing style H, see previous page.

Model	Outlet Qty. (NEMA Type)	Cord Length	NEMA Plug Type (Style)	Total Transformer Capacity ⁽¹⁾	Circuit Breaker	Illuminated On/Off Switch ⁽²⁾	Housing Color	Retail Packaging	Housing Style ⁽³⁾
Rack-Mount Power Strips (1U)—Metal Housing									
RS-1215	6 Front, 6 Rear (5-15R)	15 ft.	5-15P (Straight)	6	15A	Yes	Black	No	I
RS-1215-RA	6 Front, 6 Rear (5-15R) ⁽⁴⁾	15 ft.	5-15P (Straight)	12	15A	Yes	Black	No	I
RS-1215-20	6 Front, 6 Rear (5-20R) ⁽⁵⁾	15 ft.	5-20P (Straight)	12	20A	Yes	Black	No	I
RS-1215-20T	6 Front, 6 Rear (5-15/20R) ⁽⁵⁾	15 ft.	L5-20P (Straight)	12	20A	Yes	Black	No	I
RS-0615-F	6 Front (5-15R)	15 ft.	5-15P (Straight)	3	15A	Yes	Black	No	I
RS-0615-R	6 Rear (5-15R)	15 ft.	5-15P (Straight)	3	15A	Yes	Black	No	I

All models are certified to meet UL standards; additional certifications vary by model. All models are compatible with standard 120V operation. Most models have keyhole slots, flanges or adjustable brackets for mounting. (1) Transformer capacity varies with transformer size. (2) Most models have a snap-tight cover that reduces the risk of accidental shutoff. Visit triplite.eaton.com for exact model features. (3) Photos represent housing style only. Refer to the specification chart or visit triplite.eaton.com for exact model features. (4) Right-angle outlets. (5) NEMA 5-20R outlets support NEMA 5-15P and NEMA 5-20P plugs.

Safe-IT Antimicrobial Chargers



Safe-IT
AntiMICROBIAL
PRODUCTS

Model	Outlet Qty. (NEMA Type)	Charging Ports	Cord Length	NEMA Plug Type (Style)	Total Transformer Capacity ⁽¹⁾	Circuit Breaker	Housing Color	Retail Packaging	Housing Style ⁽³⁾
Safe-IT Power Strip with USB Charging — Antimicrobial Plastic Housing									
PS26PD32WCAM	2 (5-15R)	1 USB-C PD 3.0 (3A) and 2 USB-A (4.8A Total) Charging Ports	6 ft.	5-15P (Right Angle)	2	10A	White	Yes	J
Safe-IT Universal Travel Charger—Antimicrobial Plastic Housing									
SK2UTRAVAM	2 (5-15R)	2 USB-A Charging Ports (3.4A Total)	Direct Plug-In	5-15P ⁽⁴⁾	—	10A	Black	Yes	K
Safe-IT In-Desk Power and Charging Docks—Antimicrobial Plastic Housing									
PS22POPAM ⁽⁵⁾	2 (5-15R)	2 USB-A Charging Ports (4.5A Total)	6 ft.	5-15P (Right Angle)	—	15A	Black	Yes	L
PS22DATAM ⁽⁶⁾	2 (5-15R)	2 USB-A Charging Ports (4.5A Total)	10 ft.	5-15P (Right Angle)	2	15A	Black	Yes	M

All models are certified to meet UL standards; additional certifications vary by model. All models are compatible with standard 120V operation. Models do not have an on/off switch. (1) Transformer capacity varies with transformer size. (3) Photos represent housing style only. Refer to the specification chart or visit triplite.eaton.com for exact model features. (4) Includes 5 plug adapters (North America, Japan, U.K., Europe, China). (5) Fits in 3" dia. cutouts. (6) PS22DATAM includes 2 USB-A data ports, a USB-B port and HDMI, phone and Ethernet couplers. It requires a 7.95" x 4.06" opening.

Safety Series Power Strips

Model	Outlet Qty. (NEMA Type)	Cord Length	NEMA Plug Type (Style)	Total Transformer Capacity ⁽¹⁾	Circuit Breaker	Outlet Safety Covers	Illuminated On/Off Switch	Cord Clip and Cord Wrap with Hanger	Housing Style ⁽³⁾
Power It! Safety Series Power Strips with GFCI Plug—Include retail packaging									
TLM825GF	8 (5-15R)	25 ft.	5-15P (Straight)	6	15A	4	Yes	Yes	N
TLM812GF	8 (5-15R)	12 ft.	5-15P (Straight)	6	15A	4	Yes	Yes	N
TLM609GF	6 (5-15R)	9 ft.	5-15P (Straight)	4	15A	4	Yes	Yes	O
Power It! Safety Series Power Strips—Include retail packaging									
TLM815NS	8 (5-15R)	15 ft.	5-15P (Straight)	6	15A	4	Yes	Yes	N
TLM626NS	6 (5-15R)	6 ft.	5-15P (Straight)	4	15A	4	Yes	No	P

Housings are yellow. All models are certified to meet UL standards and comply with OSHA safety color code standards. All models are compatible with standard 120V operation. Outlets have right-angle design. All models have a metal housing and keyhole mounting slots. (1) Transformer capacity varies with transformer size. (3) Photos represent housing style only. Refer to the specification chart or visit triplite.eaton.com for exact model features.

FIND IT FAST! Try our interactive surge protector selector guide at triplite.eaton.com/PSselector



Eaton
1000 Eaton Boulevard
Cleveland, OH 44122
United States
Eaton.com



© 2024 Eaton
All Rights Reserved
Printed in USA
Publication No. BR158010EN / 23-12-038
January 2024

Eaton is a registered trademark.

All other trademarks are property of their respective owners.

Follow us on social media to get the latest product and support information.



Surge Protection Devices



2.1 Surge Protection Devices and Lightning Arresters

- Product Description V1-T2-2
- Application Description V1-T2-2
- Standards and Certifications V1-T2-3
- Product Selection V1-T2-4



Surge Protection Devices

2



Contents

<i>Description</i>	<i>Page</i>
Surge Protection Devices and Lightning Arresters	
Standards and Certifications	V1-T2-3
Product Selection	V1-T2-4

Product Description

Due to the evolution of electronics and microprocessors in the home, there is a continuous challenge to provide quality (clean) power for electronic loads such as appliances, computers/home office and entertainment systems. Surges caused by lightning, utility grid switching and other sources travel on current carrying conductors throughout the home, which can affect and destroy sensitive electronic loads.

Eaton offers a comprehensive family of surge products for use at service entrances. These products can help protect sensitive electronics against the damaging effects of surges.

Application Description

Two-Stage Protection

Two stages of surge suppression are recommended to provide the best protection for electronic equipment. Two-stage surge suppression should be provided for all cables entering a home, including power, Internet and coaxial.

Service Entrance Surge Protection

Eaton's service entrance surge protection units provide premier surge protection for AC power at the service entrance. These products provide protection for residential electrical equipment by reducing power surges to an acceptable level for surge strips to handle at the point of use.

UL 1449 3rd Edition Type 1 and Type 2 Surge Protection

- **Type 1 Surge Protective Device (SPD)**— Permanently connected Type 1 SPDs are intended for installation between the secondary of the service transformer and the line side of the service equipment overcurrent device, as well as the load side, including watt-hour meter socket enclosures, and are intended to be

installed without an external overcurrent protective device. Type 1 devices are dual-rated for Type 2 applications as well, providing the highest ratings available for installation at the service entrance

- Eaton's CHSPT1 products provide Type 1 surge protection in accordance with UL® 1449 3rd Edition. These units can be universally mounted outside any manufacturer's primary service equipment
- **Type 2 Surge Protective Device**—Permanently connected Type 2 SPDs are intended for installation on the load side of the service equipment overcurrent device, including SPDs located at the branch panel
 - CHSPT2 products provide Type 2 surge protection in accordance with UL 1449 3rd Edition. These units can be mounted outside of any manufacturer's loadcenter or inside an Eaton Surge/Surge Ready loadcenter. Eaton also offers accessories to the CHSPT2 line for cable protection

- **Factory-Installed Surge Protection**—Eaton's loadcenters with factory-installed surge protection include a CHSPT2ULTRA and a two-pole 50 A circuit breaker. These loadcenters increase the effectiveness of surge protection due to reduced lead length. A modified deadfront allows for easy viewing of indicating lights for status indication



Surge Panel

- **Surge Ready Loadcenter**—The Surge Ready loadcenter provides a mounting provision for the CHSPT2ULTRA. This loadcenter has a modified deadfront to allow for viewing of indicating lights

Two-Stage Protection



① CHSP installed at the service entrance panel.

② SurgeTrap™ surge traps and strips located where sensitive electronics are plugged in.

Plug-On Surge Protection

- Type CHPSURGE, CHNSURGE**—For use on single-phase 120/240 Vac systems. The CHSA easily plugs into a single-phase Type CH loadcenter and occupies two 3/4-inch (19.1 mm) pole spaces, similar to a two-pole Type CH breaker. When installed properly, it provides surge protection for the entire loadcenter. If internal components are damaged, the CHSA LED visual indicators will signal the need for a replacement. This device is suitable for service entry locations when installed in accordance with NEC® guidelines
- Type BRPSURGE, BRNSURGE**—For use on single-phase 120/240 Vac systems. This easily plugs into a single-phase Type BR loadcenter and occupies two 1-inch (25.4 mm) pole spaces similar to a two-pole Type BR breaker. When installed properly, it provides surge protection for the entire loadcenter. If internal components are damaged, the BRPSURGE LED visual indicators will signal the need for replacement. This device is suitable for service entry locations when installed in accordance with NEC guidelines
- Type CHQSA**—For use on single-phase, 120/240 Vac systems. This unit easily plugs into a Square D single-phase loadcenter Type QO® and occupies two 3/4-inch (19.1 mm) pole spaces similar to a two-pole Type QO breaker. When installed properly, it provides surge protection for the entire loadcenter. If internal components are damaged, the CHQSA LED visual indicators will signal the need for a replacement. This device is suitable for service entrance locations installed in accordance with NEC guidelines. This device is UL classified to be used in place of Square D Type QO surge arresters (refer to Pub-23974)
- Type CLSURGE**—For use on single-phase 120/240 Vac systems. CLSURGE easily plugs into a single-phase Type BR loadcenter and occupies two 1-inch (25.4 mm) pole spaces similar to a two-pole Type BR breaker. When installed properly, it provides surge protection for the entire loadcenter. If internal components are damaged, the CLSURGE LED visual indicators will signal the need for replacement. This device is suitable for service entry locations when installed in accordance with NEC guidelines. This unit is also classified by UL for use in select GE, ITE/Siemens and Crouse-Hinds panels

Type 3 Point-of-Use Surge Protection

Point-of-use surge protectors such as surge receptacles are installed within 30 ft of conductor length from the service panel and are designed to offer premium surge protection for specific electronics while providing innovative features to enhance user convenience.

Standards and Certifications

- CHSPT1 Products: UL 1449 3rd Edition Type 1
- CHSPT2 Products: UL/cUL® 1449 3rd Edition Type 2
- CHSPCABLE: UL 6500, cUL
- NEMA® 3R Enclosure for CHSPCABLE: UL 50 Enclosure
- BRNSURGE, BRPSURGE, CHNSURGE, CHPSURGE, CHQSA, CLSURGE: UL 1449 3rd Edition plug-in type; Type 2 SPD



2.1

Surge Protection

Surge Protection Devices and Lightning Arresters





Product Selection

2


SPD Type 1 CHSP Service Entrance Surge Protection—UL 1449 3rd Edition

Product Features

- Commercial grade AC power protection
- Type 1 surge device for installation before or after the main service disconnect
- Convenient mounting options—universal fit to any manufacturer's equipment
- Clear, visible LED indication displaying status of the surge protector

Catalog Number	Connection	Enclosure	Voltage	Phase	Frequency (Hz)	MCOV ^①	VPR ^②	I _n ^③	SCCR ^④	Surge Current Capacity, Per Phase Rating ^⑤
 CHSPT1ULTRA	Permanently connected device installed before or after the service disconnect overcurrent device.	NEMA 4	100/200 Vac, 110/220 Vac, 120/240 Vac	Single	50/60	300 V L–L, 150 V L–N	1000 V L–L, 600 V L–N	20 kA	200 kA	50 kA
 CHSPT1MAX	Permanently connected device installed before or after the service disconnect overcurrent device.	NEMA 4	100/200 Vac, 110/220 Vac, 120/240 Vac	Single	50/60	300 V L–L, 150 V L–N	1000 V L–L, 600 V L–N	20 kA	200 kA	45 kA
 CHSPT1MICRO	Permanently connected device installed before or after the service disconnect overcurrent device.	NEMA 4	100/200 Vac, 110/220 Vac, 120/240 Vac	Single	50/60	300 V L–L, 150 V L–N	1000 V L–L, 600 V L–N	20 kA	200 kA	36 kA
 CHSPT1-208Y	Permanently connected device installed before or after the service disconnect overcurrent device.	NEMA 4	120/208 Vac	Three-phase wye	50/60	300 V L–L, 150 V L–N	1000 V L–L, 600 V L–N	20 kA	200 kA	50 kA

Accessory for Type 1 CHSP Service Entrance Surge Protection

Catalog Number	Description
 SP1DINRAILKIT	Mounting kit for wall or DIN rail installation.

Notes



- ① MCOV: Maximum Continuous Operating Voltage that may be applied to the device per mode.
- ② VPR: Voltage Protection Rating is the measured limiting voltage after a surge event.
- ③ I_n: Nominal Discharge Current is the current that the device can withstand for 15 impulses.
- ④ SCCR: The amount of current the product can withstand under short-circuit conditions.
- ⑤ Surge Current Capacity: The maximum one time surge current rating per phase.

For warranty details, go to www.eaton.com/surgetrap.

SPD Type 2 CHSP Service Entrance Surge Protection—UL 1449 3rd Edition; cUL

Product Features

- AC power protection
- Universally connects to any manufacturer’s loadcenter (breaker box)
- Quick connect design—easy to mount cable protection modules
- LED status indication

Catalog Number	Connection	Enclosure	Voltage	Phase	Frequency (Hz)	MCOV ^①	VPR ^②	I _n ^③	SCCR ^④	Surge Current Capacity, Per Phase Rating ^⑤
 CHSPT2ULTRA	Can be attached to the outside of any manufacturer’s loadcenter (breaker box). This product should be connected on the load side of the loadcenter main service disconnect through a dedicated circuit breaker (follow NEC Guidelines).	NEMA 4	120/240 Vac rated line voltage	Single	60	150 V L–N, 300 V L–L	600 V L–N, 1000 V L–L, 800 V N–G, 600 V L–G	20 kA ^⑥	22 kA	108 kA (L1–N 54 kA, L1–G 54 kA, L2–N 54 kA, L2–G 54 kA)
 CHSPT2SURGE	Can be attached to the outside of any manufacturer’s loadcenter (breaker box). This product should be connected on the load side of the loadcenter main service disconnect through a dedicated circuit breaker (follow NEC Guidelines).	NEMA 4	120/240 Vac rated line voltage	Single	60	150 V L–N, 300 V L–L	600 V L–N, 1000 V L–L, 800 V N–G, 600 V L–G	5 kA	22 kA	36 kA (L1–N 18 kA, L1–G 18 kA, L2–N 18 kA, L2–G 18 kA)

Notes

- ① MCOV: Maximum Continuous Operating Voltage that may be applied to the device per mode.
- ② VPR: Voltage Protection Rating is the measured limiting voltage after a surge event.
- ③ I_n: Nominal Discharge Current is the current that the device can withstand for 15 impulses.
- ④ SCCR: The amount of current the product can withstand under short-circuit conditions.
- ⑤ Surge Current Capacity: The maximum one time surge current rating per phase.
- ⑥ When used with a 50 A two-pole circuit breaker, 10 kA when used with a 15 A two-pole circuit breaker.

For warranty details, go to www.eaton.com/surgetrap.

2.1

Surge Protection

Surge Protection Devices and Lightning Arresters

2

SPD Type 2 Plug-On Surge Protection—UL 1449 3rd Edition

Product Features

- Convenient surge protection for the loadcenter

Catalog Number	Description	Connection	Voltage	Phase	Frequency (Hz)	MCOV ^①	VPR ^②	I _n ^③	SCCR ^④	Surge Current Capacity, Per Phase Rating ^⑤
 BRPSURGE	UL for use in a single-phase Type BR loadcenter.	Plug on to the loadcenter bus; see instructions.	120/240 Vac	Single	60	150 V L1–N, 300 V L–L	500 V L1–N, 1000 V L–L	3 kA	10 kA	18 kA
 BRNSURGE	UL for use in a single-phase Type BR loadcenter.	Plug on to the loadcenter bus; see instructions.	120/240 Vac	Single	60	150 V L1–N, 300 V L–L	600 V L1–N, 1000 V L–L	3 kA	10 kA	18 kA
 CLSURGE	This unit is classified by UL for use in select GE, ITE/Siemens and Crouse-Hinds panels (refer to Pub. No. 5655B65H01 for additional details).	Plug on to the loadcenter bus; see instructions.	120/240 Vac	Single	60	150 V L1–N, 300 V L–L	600 V L1–N, 1000 V L–L	3 kA	10 kA	18 kA
 CHPSURGE	UL and CSA for use in a Type CH loadcenter.	Plug on to the loadcenter bus; see instructions.	120/240 Vac	Single	60	150 V L1–N, 300 V L–L	500 V L1–N, 1000 V L–L	3 kA	10 kA	18 kA
 CHNSURGE	UL and CSA for use in a Type CH loadcenter.	Plug on to the loadcenter bus; see instructions.	120/240 Vac	Single	60	150 V L1–N, 300 V L–L	600 V L1–N, 1000 V L–L	3 kA	10 kA	18 kA
 CHQSA	This device is UL classified to be used in place of Square D Type QO surge arresters (refer to Pub-23974).	Plug on to the loadcenter bus; see instructions.	120/240 Vac	Single	60	150 V L1–N, 300 V L–L	600 V L1–N, 1000 V L–L	3 kA	10 kA	18 kA

Notes

- ① MCOV: Maximum Continuous Operating Voltage that may be applied to the device per mode.
- ② VPR: Voltage Protection Rating is the measured limiting voltage after a surge event.
- ③ I_n: Nominal Discharge Current is the current that the device can withstand for 15 impulses.
- ④ SCCR: The amount of current the product can withstand under short-circuit conditions.
- ⑤ Surge Current Capacity: The maximum one-time surge current rating per phase.

For warranty details, go to www.eaton.com/surgetrap.

Accessories for CHSP Type 2 Service Entrance Protection

Catalog Number	Description	Installation	Surge Current Capacity	DC Breakdown Voltage	Voltage
CHSPT2ULTBUNDLE 	CHSPT2ULTBUNDLE CHSPT2ULTRA with TR receptacle included. Can be attached to the outside of any manufacturer's loadcenter (breaker box). This product should be connected on the load side of the loadcenter main service disconnect through a dedicated circuit breaker (follow NEC Guidelines).				
CHSPT2SURBUNDLE 	CHSPT2SURBUNDLE CHSPT2SURGE with TR receptacle included. Can be attached to the outside of any manufacturer's loadcenter (breaker box). This product should be connected on the load side of the loadcenter main service disconnect through a dedicated circuit breaker (follow NEC Guidelines).				
CHSPCABLE 	CHSPCABLE Quick Connect design—add additional telephone and AC protection modules; protects two quad shield cables; bi-directional	Indoor installation; or rain-tight when used with recommended enclosure	10 kA per line	145 V	
CHSPT22PACK 	CHSPT22PACK 2-Pack: CHSPT2ULTRA + CHSPCABLE; Surge protection for AC power and cable—see individual product features		See individual product ratings		
CHSP3RTELCABLE 	CHSP3RTELCABLE Raintight enclosure for CHSPTELE and CHSPCABLE; top or bottom feed; enclosure only, surge not included; accommodates up to two devices				
CHSPT2FLUSHMNT 	CHSPT2FLUSHMNT Flushmount kit for: CHSPT2ULTRA, CHSPT2MAX, CHSPT2SURGE, CHSPCABLE				
CHSPFMKIT 	CHSPFMKIT Flushmount kit for: CHSPT2ULTRA, CHSPT2MAX, CHSPT2SURGE, CHSPCABLE				
MSEGR2 	MSEGR2 Outdoor communication grounding device; meets 2008 NEC requirements for intersystem bonding termination				

NoteFor warranty details, go to www.eaton.com/surgetrap.

2.1

Surge Protection

Surge Protection Devices and Lightning Arresters

Type BR and CH Surge Breakers

2

Product Description

The CH and BR surge breaker is designed to provide premier AC power surge protection for sensitive electronics and appliances from the damaging effects of electrical surges. In addition, the surge breaker is a functional two-pole thermal magnetic breaker.

The combination of circuit protection and surge protection provides extra flexibility and space saving in the loadcenter.

Product Features

- Complete home surge protection for all circuits plus a functional two-pole thermal magnetic breaker
- LEDs provide protection status
- Plug-on connection to the bus bar provides superior protection and easy installation for new construction or renovation
- Eliminates the potential for incorrect installation of externally mounted surge devices—(longer “lead” lengths can reduce protection levels)

Type CH Surge Breakers



Catalog Number ^①	Poles	Ampere Rating	Voltage	Phase	Frequency (Hz)	MCOV ^②	VPR ^③	I _n ^④	SCCR ^⑤	Surge Current Capacity, Per Phase Rating ^⑥
Type CH Surge Breakers										
CH230SUR	Two-pole 10 kAIC	30	120/240 Vac	Single	50/60	150 V L–N, 300 V L–L	600 V L–N, 1000 V L–L	10 kA	10 kA	36 kA (L1–N 36 kA, L2–N 36 kA)
CH250SUR		50	120/240 Vac	Single	50/60	150 V L–N, 300 V L–L	600 V L–N, 1000 V L–L	10 kA	10 kA	36 kA (L1–N 36 kA, L2–N 36 kA)

Type BR Surge Breakers



Catalog Number ^①	Poles	Ampere Rating	Voltage	Phase	Frequency (Hz)	MCOV ^②	VPR ^③	I _n ^④	SCCR ^⑤	Surge Current Capacity, Per Phase Rating ^⑥
Type BR Surge Breakers										
BR230SUR	Two-pole 10 kAIC	30	120/240 Vac	Single	50/60	150 V L–N, 300 V L–L	600 V L–N, 1000 V L–L	10 kA	10 kA	36 kA (L1–N 36 kA, L2–N 36 kA)
BR250SUR		50	120/240 Vac	Single	50/60	150 V L–N, 300 V L–L	600 V L–N, 1000 V L–L	10 kA	10 kA	36 kA (L1–N 36 kA, L2–N 36 kA)


Notes

- ① Clamshell packaging available with CS modification code on the end of catalog number.
- ② MCOV: Maximum Continuous Operating Voltage that may be applied to the device per mode.
- ③ VPR: Voltage Protection Rating is the measured limiting voltage after a surge event.
- ④ I_n: Nominal Discharge Current is the current that the device can withstand for 15 impulses.
- ⑤ SCCR: The amount of current the product can withstand under short-circuit conditions.
- ⑥ Surge Current Capacity: The maximum one time surge current rating per phase.

Surge Protection Receptacles with LED Indicators and Audible Alarm

Product Description

- Two-pole, three-wire grounding
- 15 A, 125 Vac; 20 A, 125 Vac; NEMA 5-15R and 5-20R



➡ ArrowLink option available. Add "M" suffix to standard catalog number (example 8300WS, 8300WSM).

🔧 Build-to-spec customizable devices.

Catalog Number	Color Suffix	Ampere Rating	Voltage	NEMA	Description	➡	🔧
5362_S							
Receptacles with Audible Alarm and LED Indicators, Back and Side Wire							
5262__S	BL, GY, V, W	15	125 Vac	5-15R	Surge duplex receptacle	■	■
IG5262__S	BL, GY, RN, V, W				IG Surge duplex receptacle	■	■
5362__S	BL, GY, V, W	20	125 Vac	5-20R	Surge duplex receptacle	■	■
IG5362__S	BL, GY, RN, V, W				IG Surge duplex receptacle	■	■
560 Joules, max. surge current—18 kA per mode							
Receptacles with LED Indicators, Back and Side Wire							
5250__S	BL, GY, V, W	15	125 Vac	5-15R	Surge duplex receptacle	■	■
IG5250__S	BL, GY, RN, V, W				IG Surge duplex receptacle	■	■
5350__S	BL, GY, V, W	20	125 Vac	5-20R	Surge duplex receptacle	■	■
IG5350__S	BL, GY, RN, V, W				IG Surge duplex receptacle	■	■
840 Joules, max. surge current—18 kA per mode							
Receptacles with Audible Alarm							
1208__	V, W	15	125 Vac	5-15R	Surge duplex receptacle	■	■
IG1208__	V, W				IG Surge duplex receptacle	■	■
1210__	BL, V, W	20	125 vac	5-20R	Surge duplex receptacle	■	■
IG1210__	V, W				IG Surge duplex receptacle	■	■
340 Joules, max. surge current—12 kA per mode							


Catalog Number	Color Suffix	Ampere Rating	Voltage	Description
Multimedia Wallplates with Surge Protectors				
35M2S__	W	15	125	Multimedia wallplate with recessed duplex surge receptacle
cETLus listed to UL1863 & ANSI/UL 60950-1, CSA C22.2 no. 60950-1-03; complies with all TIA/EIA 568-A & 570-B requirements				

Catalog Number	Color Suffix	Description
Replacement Surge Bloc Module		
1209__	A, BL, GY, V, W	Replacement module

Catalog Number	Color Suffix	Description
Accessories for Surge Protection Receptacles		
PJ26BL	BL	1-Gang mid-size decorator polycarbonate wallplate
PJ26W	W	1-Gang mid-size decorator polycarbonate wallplate
PJ26IG	RN	1-Gang mid-size decorator polycarbonate wallplate, pre-marked "ISOLATED GROUND"

Notes

For ordering devices, include catalog number followed by the color suffix: BL (Blue), GY (Gray), RD (Red), RN (Orange), V (Ivory), W (White)



Compliances, specifications and availability are subject to change without notice.

2.1

Surge Protection

Surge Protection Devices and Lightning Arresters

2

Factory-Installed Surge Protection

- Includes a CHSPT2ULTRA and a two-pole 50 A circuit breaker
- Increases the effectiveness of surge protection due to reduced lead length
- A modified deadfront allows for easy viewing of indicating lights for status indication

Surge Installed



Surge Installed Loadcenters

Catalog Number	Description	Cover Catalog Number	
		Combination	Surface
CHSUR42N225L ①	42 ckt, 225 A, convertible	CHSUR8LF	CHSUR8LS
CHSUR42L225L2 ①	42 ckt, 225 A, convertible ②	CHSUR8LF	CHSUR8LS
CHSUR42B200L2 ①	42 ckt, 200 A, main breaker	CHSUR8LF	CHSUR8LS
CHSUR32N225K ①	32 ckt, 225 A, convertible	CHSUR8KF	CHSUR8KS
CHSUR32L225K ①	32 ckt, 225 A, convertible ②	CHSUR8KF	CHSUR8KS
CHSUR32B200K ①	32 ckt, 200 A, main breaker	CHSUR8KF	CHSUR8KS
CHSUR32B150K ①	32 ckt, 150 A, main breaker	CHSUR8KF	CHSUR8KS
CHSUR32B100K ①	32 ckt, 100 A, main breaker	CHSUR8KF	CHSUR8KS
CHSUR24L125E ①	24 ckt, 125 A, convertible ②	CHSUR8EF	CHSUR8ES
CHSUR24B100E ①	24 ckt, 100 A, main breaker	CHSUR8EF	CHSUR8ES
BRSUR4040N200	40/40 ckt, 200 A, convertible	Cover included	
BRSUR4040L200	40/40 ckt, 200 A, main lug	Cover included	
BRSUR4040B200	40/40 ckt, 200 A, main breaker	Cover included	
BRSUR3040N200	30/40 ckt, 200 A, convertible	Cover included	
BRSUR3040L200	30/40 ckt, 200 A, main lug	Cover included	
BRSUR3040B200	30/40 ckt, 200 A, main breaker	Cover included	

Surge Ready Loadcenters

- Provides a mounting provision for CHSPT2ULTRA
- A modified deadfront allows for easy viewing of indicating lights

Surge Ready



Surge Ready Loadcenters (Provision Only, CHSPT2ULTRA and Breaker Not Included)

Catalog Number	Description	Cover Catalog Number	
		Combination	Surface
CHEC42N225L ①	42 ckt, 225 A, convertible	CHSUR8LF	CHSUR8LS
CHEC42L225L ①	42 ckt, 225 A, convertible ②	CHSUR8LF	CHSUR8LS
CHEC42B200L ①	42 ckt, 200 A, main breaker	CHSUR8LF	CHSUR8LS
CHEC32L225K ①	32 ckt, 225 A, convertible ②	CHSUR8KF	CHSUR8KS
CHEC32N225K ①	32 ckt, 225 A, convertible	CHSUR8KF	CHSUR8KS
CHEC32B200K ①	32 ckt, 200 A, main breaker	CHSUR8KF	CHSUR8KS
CHEC32B150K ①	32 ckt, 150 A, main breaker	CHSUR8KF	CHSUR8KS
CHEC32B100K ①	32 ckt, 100 A, main breaker	CHSUR8KF	CHSUR8KS
CHEC24L125E ①	24 ckt, 125 A, convertible ②	CHSUR8EF	CHSUR8ES
CHEC24B100E ①	24 ckt, 100 A, main breaker	CHSUR8EF	CHSUR8ES

Notes

- ① Order cover separately.
- ② With main lugs installed.